

Assembly Guide

PAP - series

Assembly Guide for Projector Pedestals

Models:

PAP-350/8U



PAP-500/26U



PAP-700/26U



PAP-900/26U



PAP-1150/44U



PAP-1350/52U





Assembly Guide

PAP - series

Assembly components:

- ① Frame - 2 pcs
- ② Adjustable Leg - 4 pcs
- ③ Side panel with nuts - 1 pcs
- ④ Side panel XXU with nuts - 1 pcs
- ⑤ Top Plate - 1 pcs
- ⑥ Bottom Shelf - 2 pcs
- ⑦ Screw M6x20 ISO 7380 - 4 pcs
- ⑧ Screw M6x16 ISO 7380 - 34 pcs
- ⑨ Mounting cup kit M10 (screw, washer, nut) - 4 pcs
- ⑩ Steel Cup, (SG-50) - 4 pcs
- ⑪ Steel Cup, (SG-70) - 4 pcs
- ⑫ Front panel RC-1U - 2 pcs
- ⑬ Front panel RCV-2U - 2 pcs
- ⑭ Front panel RCV-4U - 2 pcs
- ⑮ Front panel RCV-6U - 2 pcs
- ⑯ Rack Rail - 2 pcs
- ⑰ Pedestal grid RCHV-XXU - 3 pcs
- ⑱ Mounting rack kit M6 (screw, washer, nut) - 40 pcs

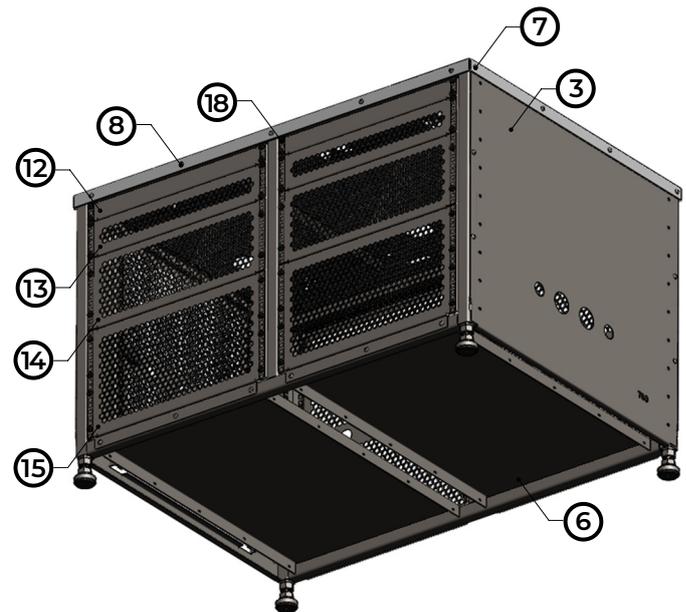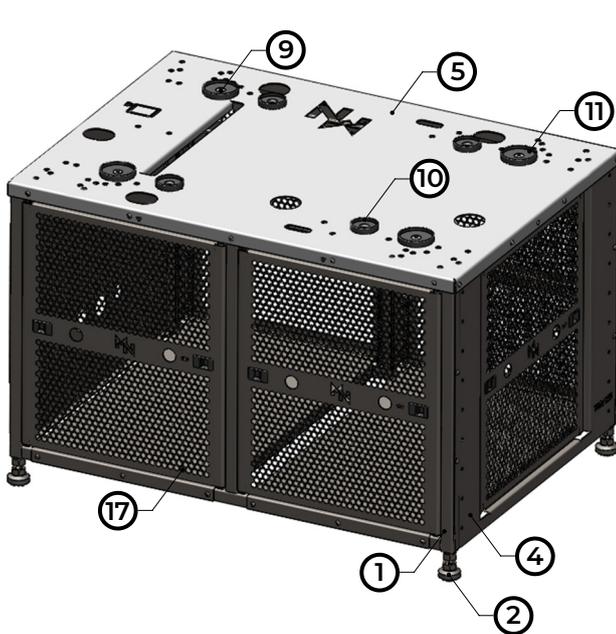


SAFETY INSTRUCTIONS

1. Entrust mounting equipment only to experienced professionals and strictly follow the provided safety instructions. Improperly installed equipment may result in property damage, personal injury and/or liability for the installing contractor.
2. Only use appropriate fastening hardware.
3. Always make sure to securely use and lock all mounting bolts. Loose bolts may become unscrewed over time due to vibration which will then create a safety hazard.


Assembly Guide

PAP - series


Assembly Instructions:

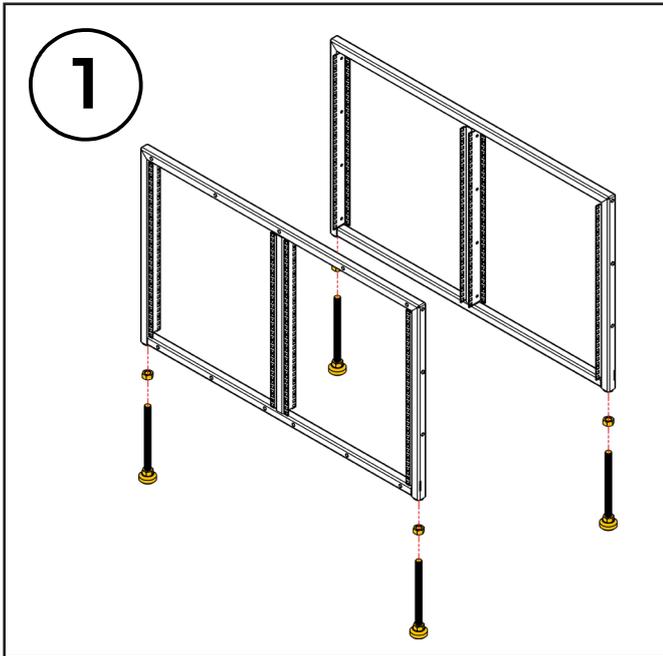


1. Start the assembly by installing Legs **2** into the both Frames **1** as shown in the picture.

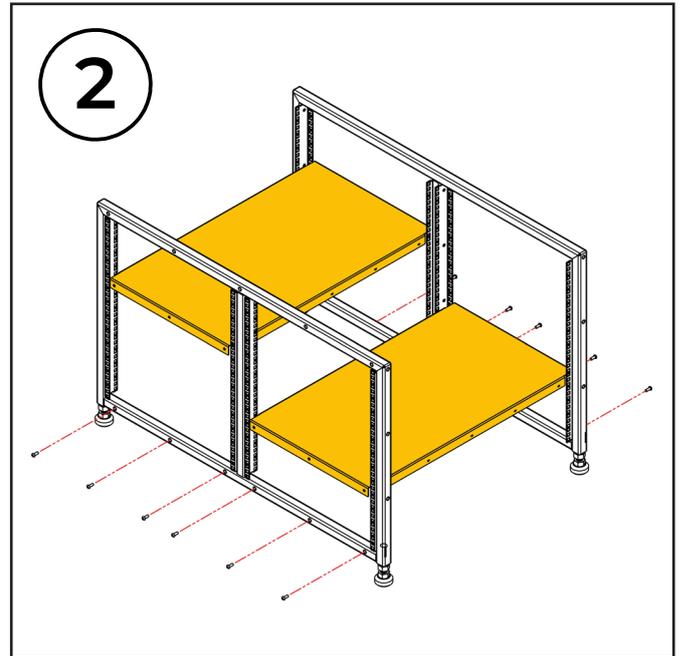

2. Install both Shelves **6** in Frames **1** and fixing them with screws M6x16 **8** as shown in the picture.

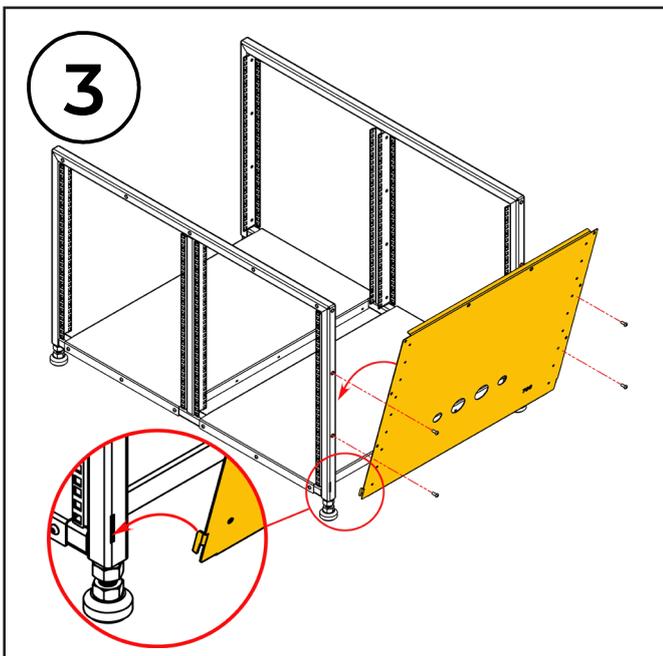


3. Install Side panel with nuts **3** and fixing them with screws M6x16 **8** as shown in the picture.

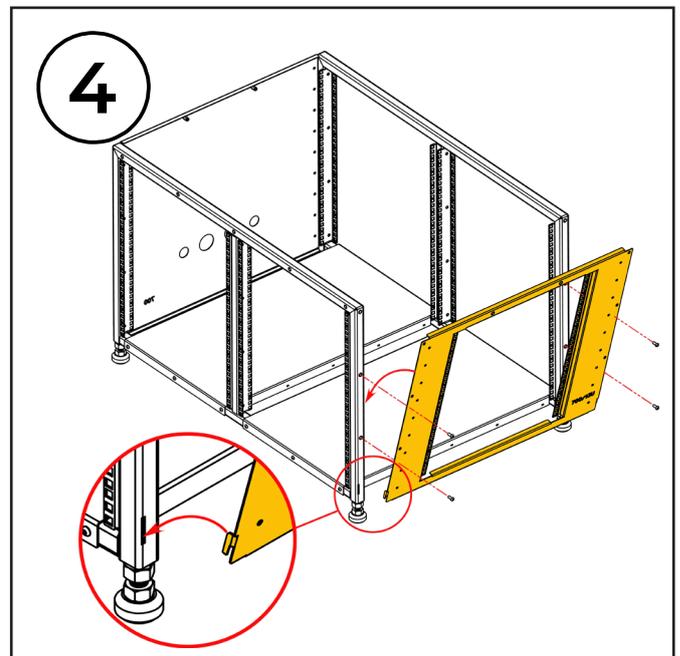


4. Install Side panel 13U with nuts **4** and fixing them with screws M6x16 **8** as shown in the picture.

Assembly Guide


PAP - series

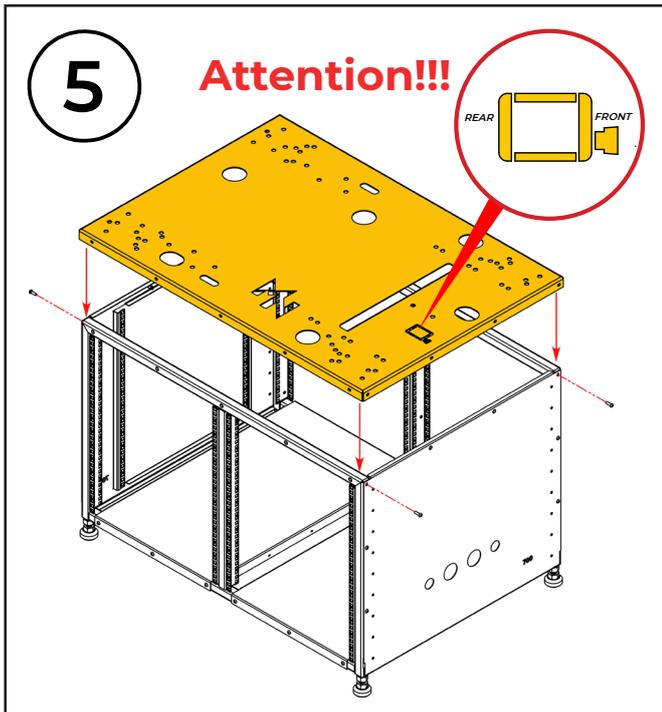


5. Install Top Plate (5) and fixing them with screws M6x20 (7) as shown in the picture.

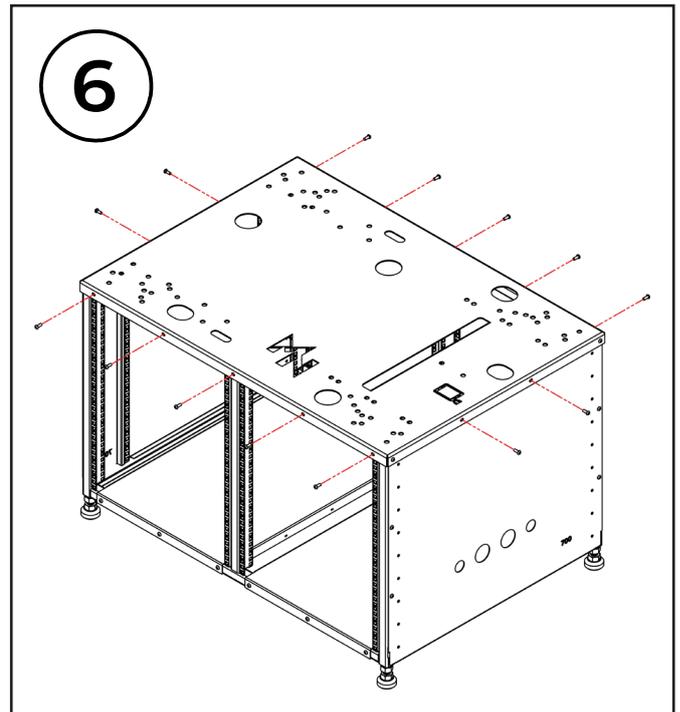

6. Mount and fixing screws M6x16 (8) as shown in the picture.

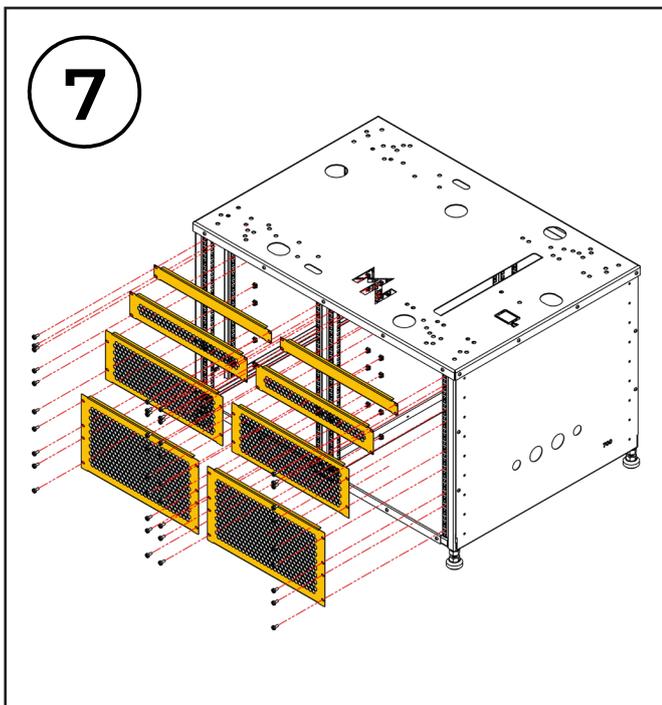


7. Install all front panels (12, 13, 14, 15) and fixing them with Mounting rack kit M6 (18) as shown in the picture.

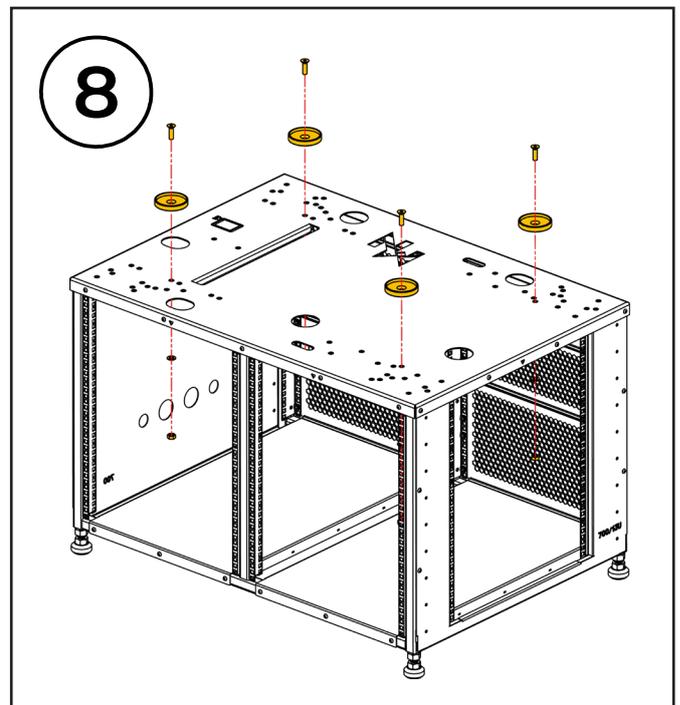


8. Install Steel Cups (10 or 11) and fixing them with Mounting cup kit M10 (9) as shown in the picture.

Assembly Guide

PAP - series

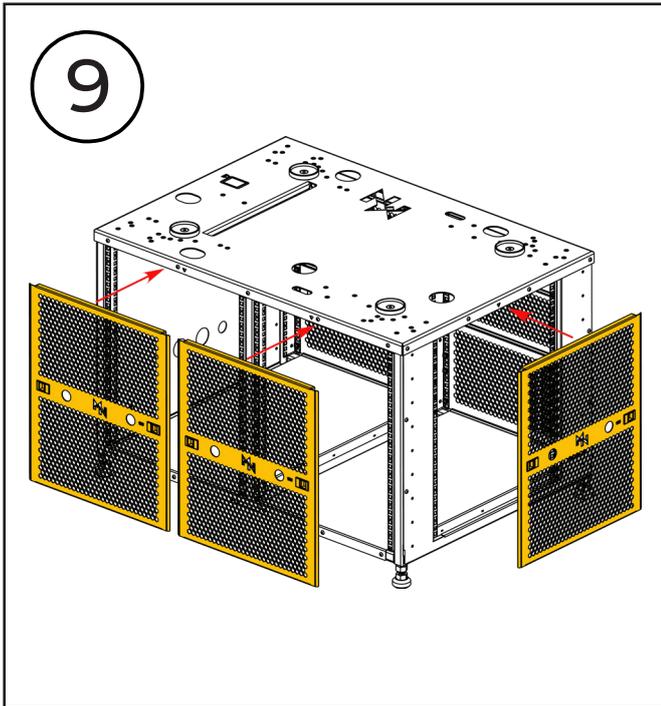


9. Install Pedestal grid XXU 17 as shown in the picture.

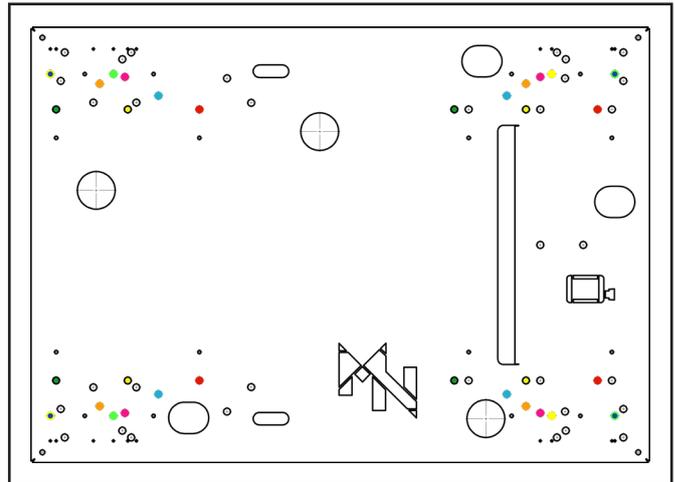


Hole pattern Nec projectors

- ● ● NEC NC 900/1000 (position 1, 2, 3)
- ● NEC NC 32XX - series
- NEC NC 1700,
NEC NC1202L/NC 1402L
- NEC NC 3541L/2041L
- NEC NC 1201L-A
- ● NEC NC2402ML/2403ML/2443ML
NEC NC1803ML/2003ML,
NEC NC1843ML/2043ML (position 1)
- ● NEC NC2402ML/2403ML/2443ML
NEC NC1803ML/2003ML,
NEC NC1843ML/2043ML (position 2)

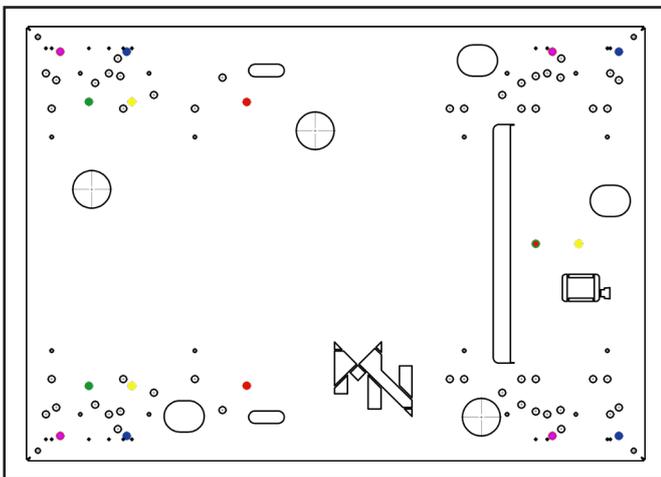

Hole pattern Barco projectors

- Barco E - series
- ● Barco S, C, SLP, CLP - series
SP2K - series, SP4K - series (position 1, 2)
- ● Barco B, BLP, L - series
SP4K-27/35/40/55 - series (position 1, 2)

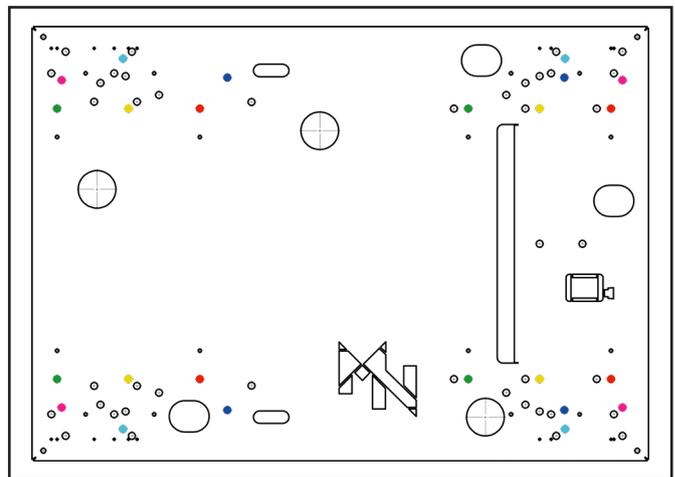

Hole pattern Christie projectors

- ● ● Christie CP 2220/2230; CP 4220/4230,
CP2420-XE, CP4420-XE (position 1, 2, 3)
- Christie SolariaONE; CP2306/2308/2310, CP2415-XE
- Christie CP 2309/2315/2320, CP2420-RGB, CP2415-RGB
- Christie CP 4315/4320/4330, CP 4415/4420/4425/4430/4435

Assembly Guide

PAP - series

Installation other accessories:

