

CMT-H

Ceiling Speaker Mounts

100 lbs (45 kg) max load

VESA 75x75 / 100x100 / 5" x 2,75"

The CMT-H is a heavy-duty speaker ceiling mount with rotation and tilt functionality.

This bracket supports loudspeakers weighing up to 45 kg (100 lbs.) and comes with a design factor of 7:1.

Its speaker & ceiling mount bracket are installed separately and coupled


very easily by just one person.

Tilt adjustments are simply achieved by means of a self-locking mechanism holding the speaker in place, even with all the bolts fully released.

The CMT-H mount fits all loudspeakers that are foreseen from

a universal mounting patterns (5" x 2,75", 4,25" x 2", VESA 75x75 and 100x100).

The CMT-H is the way to go in all immersive sound applications given its rotation of 360° and 0° to 90° vertical tilt.

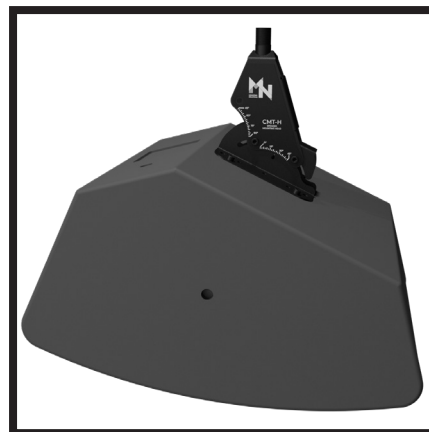

SPECIFICATIONS:

Functions	Ceiling Speaker Mounts	
Mounting holes	4x dia 8,2 mm (dia 0.32") (5" x 2,75" pattern) 4x dia 8,2 mm (dia 0.32") (4,25" x 2" pattern) VESA 75x75 VESA 100x100	
Rotation angle	360°	
Tilt angle	0° ... 90°	
Load limit	45 kg	100 lbs
Design factor	7:1 ratio	
Dimensions	195 x 150 x 115 mm	7,67" x 5,91" x 4,53"
Shipping dimensions	315 x 215 x 130 mm	12,40" x 8,46" x 5,12"
Net weight	0,87 kg	1,92 lbs
Shipping weight (2 pcs per box)	2,04 kg	4,50 lbs

COMPABILITY:

Compatible MAG Cinema speakers:	SUR-63, SUR-83, SUR-103, SUR-123, SUR-153, SUR-153H, SUR-408
Compatible JBL speakers:	9350, 9300, 9310, 9320
Compatible QSC speakers:	SR-800, SR-8101, SR-1000, SR-8200, SR-1020, SR-1030, SR-1290, SR-1590
Compatible SLS speakers:	CS1090, SC1290S-CM, SC-1290S, 114RT-I-PXO, 8290V2
Compatible Klipsch speakers:	KPT-250, KPT-1201, KPT-1200M, KPT-1260 H, KPT-8001
Compatible Vive Audio speakers:	LS1S, LS2S, LS5S, LA3Si, LA4S
Compatible Alcons speakers:	CCS8, CCS8S, CCS12

SAFETY INSTRUCTIONS

1. Entrust mounting equipment only to experienced professionals and strictly follow the provided safety instructions. Improperly installed equipment may result in property damage, personal injury and/or liability for the installing contractor.

2. **Always use safety cables!** This will prevent equipment from falling during setup or while exploitation.

3. Always carefully check the mounting surface of the wall. Make sure the wall or ceiling structure allows to hold the weight of the speaker including its bracket.

4. Only use appropriate fastening hardware.

5. Always make sure to securely use and lock all mounting bolts. Loose bolts may become unscrewed over time due to vibration which will then create a safety hazard.

PACKAGE CONTENTS

1. CMT-H ceiling speaker mounts - 2 pcs
2. Installation manual - 1 pcs
3. Hex key 5 - 1 pcs

OPTIONAL ACCESSORIES

1. CMT-D Fixed Length
2. CMT-D Telescopic Length

www.mnmounting.com
info@mnmounting.com
2 Merezhna str., Bila Tserkva,
Kyiv region, 09100, Ukraine

EMEA & Asian region:
+32 (0) 472 630212

USA, LATAM, Canada, Australia
& New Zealand region:
+1 (562) 607 7348



