


# ARC-S series

Length adjustable and  
connecting cable  
265 lbs (120 kg) max load

The ARC-S series is a length-adjustable cable for ceiling mounting of speakers or other devices. Easy to adjust and have high strength up to 120 kg (265 lbs).

The package includes all the necessary fixing parts.

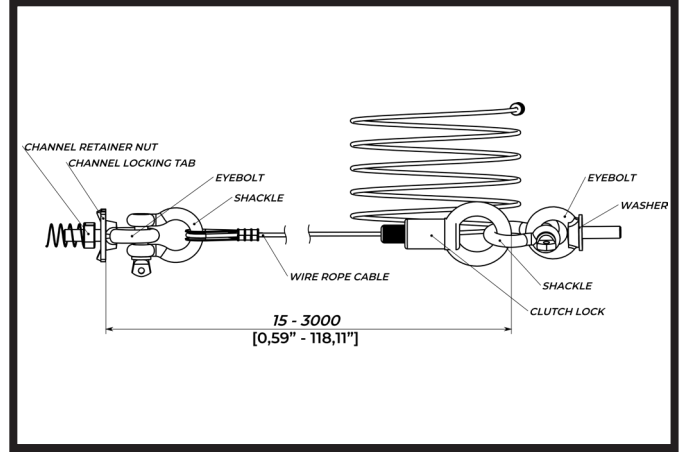

## ARC-1S-30-CH

## ARC-2S-30-CH

## ARC-3S-30-CH

## ARC-4S-30-CH

### SPECIFICATIONS:

#### Length adjustment

15 - 3000 mm      0,59" - 118,11"

#### Load limit

120 kg / 265 lbs

240 kg / 530 lbs

360 kg / 795 lbs

480 kg / 1060 lbs

#### Design factor

5:1 ratio

#### Cable thickness

4 mm / 0,16"

#### Shipping dimensions

280 x 215 x 100 mm / 11,02" x 8,46" x 3,94"

#### Shipping weight

1,1 kg / 2,43 lbs

1,9 kg / 4,19 lbs

2,7 kg / 5,95 lbs

3,5 kg / 7,72 lbs

### PACKAGE CONTENTS:

1. Wire rope cable with Clutch Lock - 1 pcs;
2. Channel retainer nut - 1 pcs;
3. Channel locking tab - 1 pcs;
4. Eyebolt M10 - 2 pcs;
5. Shackle - 2 pcs;
6. Washer M10 - 1 pcs.

1. Wire rope cable with Clutch Lock - 2 pcs;
2. Channel retainer nut - 2 pcs;
3. Channel locking tab - 2 pcs;
4. Eyebolt M10 - 4 pcs;
5. Shackle - 4 pcs;
6. Washer M10 - 2 pcs.

1. Wire rope cable with Clutch Lock - 3 pcs;
2. Channel retainer nut - 3 pcs;
3. Channel locking tab - 3 pcs;
4. Eyebolt M10 - 6 pcs;
5. Shackle - 6 pcs;
6. Washer M10 - 3 pcs.

1. Wire rope cable with Clutch Lock - 4 pcs;
2. Channel retainer nut - 4 pcs;
3. Channel locking tab - 4 pcs;
4. Eyebolt M10 - 8 pcs;
5. Shackle - 8 pcs;
6. Washer M10 - 4 pcs.

### SAFETY INSTRUCTIONS:

1. Entrust mounting equipment only to experienced professionals and strictly follow the provided safety instructions. Improperly installed equipment may result in property damage, personal injury and/or liability for the installing contractor.

2. **Always use safety cables!** This will prevent equipment from falling during setup or while exploitation.

3. Always carefully check the mounting surface of the wall. Make sure the wall or ceiling structure allows to hold the weight of the speaker including its bracket.

4. Only use appropriate fastening hardware.

5. Always make sure to securely use and lock all mounting bolts. Loose bolts may become unscrewed over time due to vibration which will then create a safety hazard.

[www.mnmounting.com](http://www.mnmounting.com)

[info@mnmounting.com](mailto:info@mnmounting.com)

2 Merezhna str., Bila Tserkva,  
Kyiv region, 09100, Ukraine

EMEA & Asian region:

+32 (0) 472 630212

USA, LATAM, Canada, Australia

& New Zealand region:

+1 (562) 607 7348



# ARC-S series

Length adjustable and  
connecting cable  
265 lbs (120 kg) max load

