# CMT-H

## **Ceiling Speaker Mounts**

100 lbs (45 kg) max load VESA 75x75 / 100x100 / 5"x2,75"

The CMT-H is a heavy-duty speaker ceiling mount with rotation and tilt functionality.

This bracket supports loudspeakers weighing up to 45 kg (100 lbs.) and comes with a design factor of 7:1. Its speaker & ceiling mount bracket are installed separately and coupled very easily by just one person.

Tilt adjustments are simply achieved by means of a self-locking mechanism holding the speaker in place, even with all the bolts fully released.

The CMT-H mount fits all loudspeakers that are foreseen from a universal mounting patterns (5"  $\times$  2,75", 4,25"  $\times$  2", VESA 75x75 and 100x100). The CMT-H is the way to go in all immersive sound applications given its rotation of 360° and 0° to 90° vertical tilt.







SPECIFICATIONS:		
Functions	Celing Speaker Mounts	
Mounting holes	4x dia 9 mm (dia 0.34") (5" x 2,75" pattern), 4x dia 9 mm (dia 0.34") (4,25" x 2" pattern), 4x dia 9 mm (dia 0.34") (6,9" x 3,4" pattern), VESA 75x75 / VESA 100x100	
Rotation angle	360°	
Tilt angle	0° 90°	
Load limit	45 kg	100 lbs
Design factor	7:1 ratio	
Dimensions	195 x 150 x 115 mm	7,67" × 5,91" × 4,53"
Shipping dimensions	315 x 215 x 130 mm	12,40" x 8,46" x 5,12"
Net weight	0,87 kg	1,92 lbs
Shipping weight (2 pcs per box)	2,04 kg	4,50 lbs
COMPABILITY:		
Compatible MAG Cinema speakers:	SUR-63, SUR-83, SUR-103, SUR-123, SUR-153, SUR-153H, SUR-408, SUR-410, SUR-420.	
Compatible JBL speakers:	8102, 9350, 9300, 9310, 9320, AC195, AC266, AC299, AC566, AC599, AC895	
Compatible QSC speakers:	SR-800, SR-1000, SR-1020, SR-1030, SR-1290, SR-1590, SR-8101, SR-8200, SR-5152	
Compatible Dolby speakers:	CS1090, CS1290S, CS1290C, 114RT-I-PXO, 8290V2; DSR-1090, DSR-1260, DSR-1280	

www.mnmounting.com info@mnmounting.com 2 Merezhna str., Bila Tserkva, Kyiv region, 09100, Ukraine

Compatible Klipsch speakers:

Compatible Alcons speakers:

Compatible Krix speakers:

Compatible Vive Audio Christie speakers:

Compatible Meyer Sound speakers:

EMEA & Asian region: +32 (0) 472 630212

USA, LATAM, Canada, Australia & New Zealand region: +1 (562) 607 7348



KPT-250, KPT-1201, KPT-1200M, KPT-1260 H, KPT-8001

LS1S, LS2S, LS5S, LA3Si, LS2C, LA4S, LA3C, LA4C

CCS8, CCS8S, CCS12, CRS12/9040, CRS12/9090, CRS12GT/60, CRS12GT/90 HMS-5, HMS-10, HMS-10 EASE, HMS-12, HMS-15,

HMS-15AC, Ultra-X20/22/23, Ultra-X40/42

KX-1152, KX-1155, KX-1470, KX-1570, KX-1570F, KX-1840, KX-1870, KX-1870F, KX-1875

# **CMT-H**

## **Ceiling Speaker Mounts**

100 lbs (45 kg) max load VESA 75x75 / 100x100 / 5"x2,75"


#### **PACKAGE CONTENTS**

- 1. CMT-H celing speaker mounts 2 pcs
- 2. Installation manual 1 pcs
- 3. Hex key 5 1 pcs

#### **OPTIONAL ACCESSORIES**

- 1. CMT-D Fixed Length
- 2. CMT-D Telescopic Length

### **Dimensions**

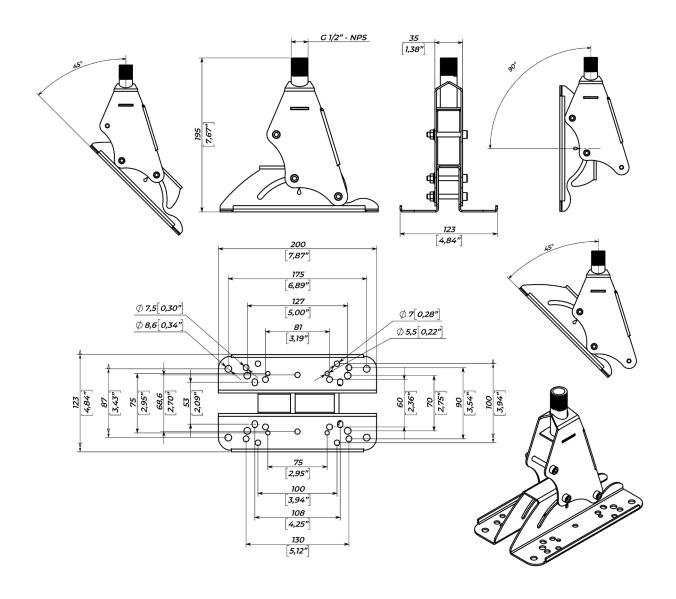

### **SAFETY INSTRUCTIONS**

- 1. Entrust mounting equipment only to experienced professionals and strictly follow the provided safety instructions. Improperly installed equipment may result in property damage, personal injury and/or liability for the installing contractor.
  - 2. Always use safety cables! This will prevent equipment from falling during setup or while exploitation.
- 3. Always carefully check the mounting surface of the wall. Make sure the wall or ceiling structure allows to hold the weight of the speaker including its bracket.
  - 4. Only use appropriate fastening hardware.
- 5. Always make sure to securely use and lock all mounting bolts. Loose bolts may become unscrewed over time due to vibration which will then create a safety hazard.

www.mnmounting.com info@mnmounting.com 2 Merezhna str., Bila Tserkva, Kyiv region, 09100, Ukraine EMEA & Asian region: +32 (0) 472 630212

USA, LATAM, Canada, Australia & New Zealand region: +1 (562) 607 7348

