


STWA-33 A simple tiltable wall mount for LED/LCD TV

The STWA-33 is a simple tiltable wall mount for LED/LCD TV.

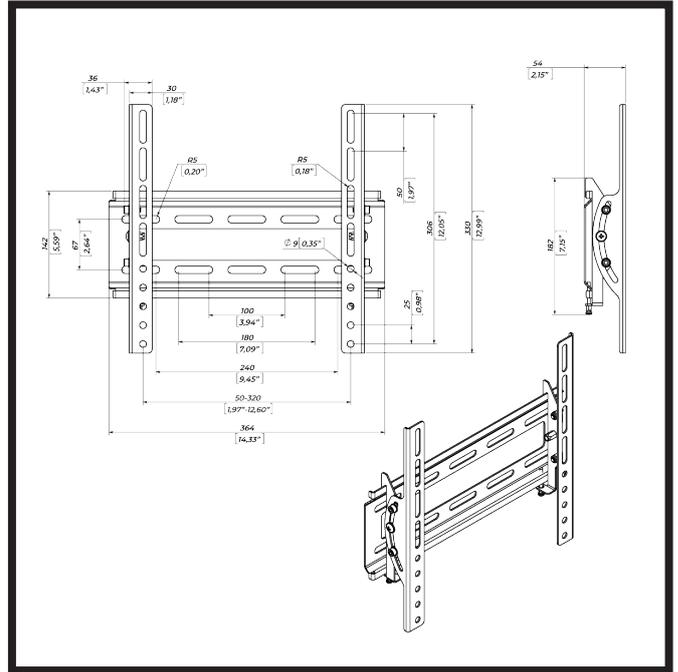

SPECIFICATIONS:

Functions	tiltable wall mount	
Distance from wall	54 mm	2,15"
TV sizes	26"-60"	
Tilt angle	+5°...-15°	
Maximum TV weight	50 kg	110 lbs
Compatible VESA sizes	50 x 50	100 x 100
	150 x 150	200 x 200
	250 x 250	300 x 300
Dimensions	330 x 364 x 54 mm	12,99" x 14,33" x 2,15"
Shipping dimensions	150 x 382 x 62 mm	5,91" x 15,04" x 2,44"
Net weight	1,09 kg	2,40 lbs
Shipping weight	1,35 kg	2,98 lbs

PACKAGE CONTENTS

Wall panel	1 pcs
Bracket Left	1 pcs
Bracket Right	1 pcs
Screw 8,0x60	4 pcs
Washer	4 pcs
Dowel 12x60	4 pcs
Screw M5x20	4 pcs
Screw M6x20	4 pcs
Screw M8x20	4 pcs

SAFETY INSTRUCTIONS

- To ensure safety, please read this manual carefully before installation and follow the instructions. Store this manual in a secure place for future reference.
- The manufacturer shall not be legally responsible for any equipment damage or personal injury caused by incorrect installation or operation other than that covered in this manual.
- The mount is designed for easy installation and removal. The manufacturer shall not be liable for damage to equipment or personal injuries arising out of human factors or acts of nature, such as earthquake or typhoon.
- It is recommended that the mount be installed by qualified personnel only.
- At least two persons are needed to install or remove the product to avoid hazard of falling objects.
- Please carefully inspect the area where the mount is to be installed:
 - Avoid places that are subject to high temperatures, humidity or contact with water.
 - Do not install the product near air conditioning vents or areas with

- excess dust and fumes.
 - Only install on vertical walls and avoid slanted surfaces.
 - Do not install in places subject to any shock or vibration.
- Maintain sufficient space around the display to ensure adequate ventilation.
 - To ensure safe installation, first check the structure of the wall, ceiling or floor and select a secure mounting location.
 - The wall, ceiling or floor should be strong enough to sustain a weight of at least four times of the display and mount combined. The mounting location must be able to withstand earthquake or other strong shock.
 - Do not modify any accessories or use broken parts. Contact your dealer with any questions.
 - Tighten all screws (do not exert excessive force to avoid breaking the screw or damaging its thread).
 - Drill holes and bolts will be left in the wall, ceiling or floor once the display and bracket are removed. Stains may occur after extended use.
 - Since the manufacturer has no way to control the wall, ceiling or floor type and installation of the mount, the warranty of the product shall only cover the body of the mount.



www.izimounting.com
 info@izimounting.com
 2 Merezhna str., Bila Tserkva,
 Kyiv region, 09100, Ukraine

EMEA & Asian region:
 +32 (0) 472 630212

USA, LATAM, Canada, Australia
 & New Zealand region:
 +1 (562) 607 7348