

Assembly Guide

AV Rack SRD-600 series

Assembly Guide for AV Racks

Models:

SRD-600/24U



SRD-600/36U



SRD-600/42U




Assembly components:

	AV Rack SRD-600/24U	AV Rack SRD-600/36U	AV Rack SRD-600/42U
Frame top AV Rack SRD-600	1 pcs	1 pcs	1 pcs
Frame bottom AV Rack SRD-600	1 pcs	1 pcs	1 pcs
Rack Pillar AV Rack SRD-600	U24 - 4 pcs	U36 - 4 pcs	U42 - 4 pcs
Side panel	U24 - 2 pcs	U36 - 2 pcs	U42 - 2 pcs
Glass door	U24 - 1 pcs	U36 - 1 pcs	U42 - 1 pcs
Blind door	U24 - 1 pcs	U36 - 1 pcs	U42 - 1 pcs
Jamper SRD-600	2 pcs	4 pcs	6 pcs
Vertical profile U12	8 pcs	12 pcs	12 pcs
Vertical profile U6	-	-	4 pcs
Cable channel U12	4 pcs	6 pcs	6 pcs
Shelf	2 pcs	2 pcs	2 pcs
Screw M6x16 DIN 912	16 pcs	16 pcs	16 pcs
Leg M10x30	4 pcs	4 pcs	4 pcs

Assembly Guide

AV Rack SRD-600 series

SRD-600/24U

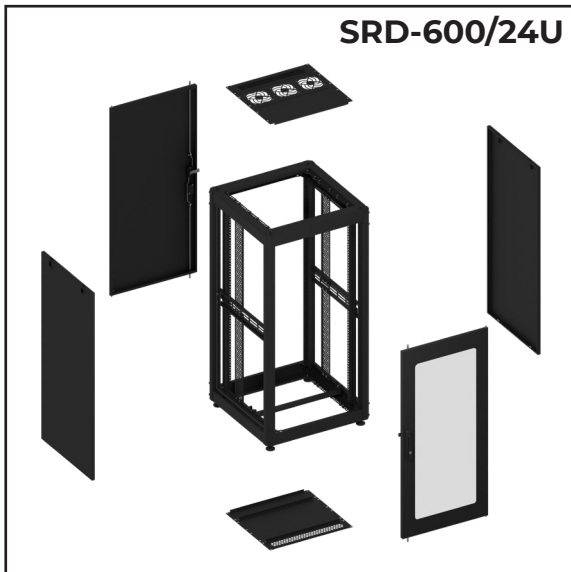


Shelf
(2 pcs included)



RPB-2U
Rack Panel with cable access slot and brushes, 2U height
(1 pcs included)





RC-2U
Rack Cover, 2U height
(1 pcs included)

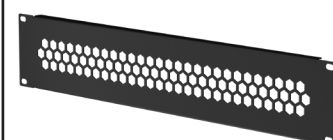


RCV-2U
Rack perforated Cover, 2U height (1 pcs included)

SRD-600/36U

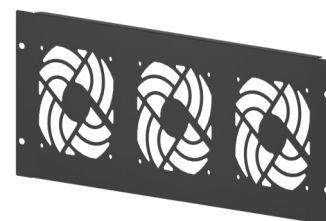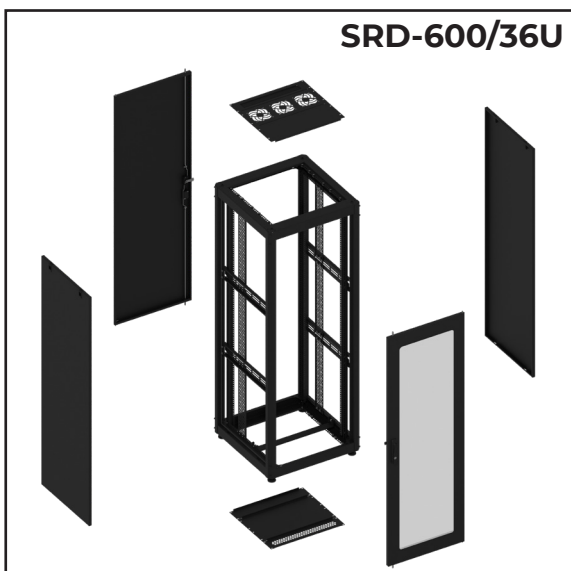


RCF-4U
Rack Cover for 3 fans, 4U height (1 pcs included)

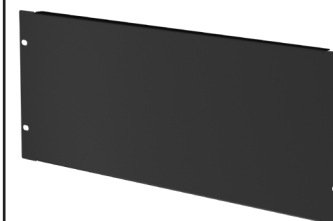


RC-4U
Rack Cover, 4U height
(1 pcs included)


SRD-600/42U

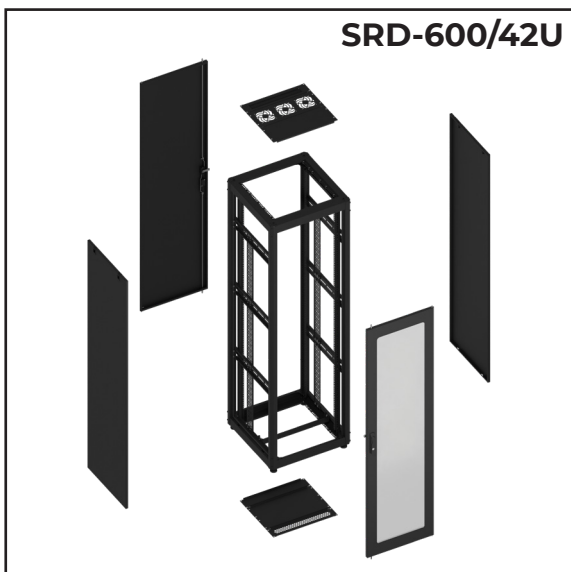


Vertical profile 12U/6U

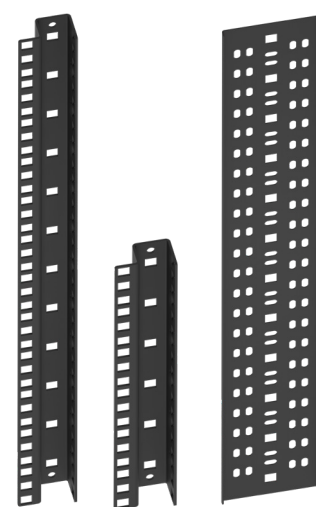

Cable channel 12U

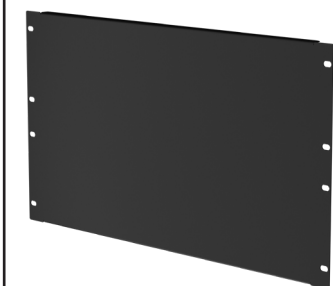

RC-6U
Rack Cover, 6U height
(1 pcs included)

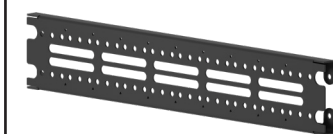


Jumper RD-600

Assembly Guide

AV Rack SRD-600 series

Assembly components:

- ① Frame top AV Rack SRD-600
- ② Frame bottom AV Rack SRD-600
- ③ Rack Pillar AV Rack SRD-600
- ④ Side panel
- ⑤ Glass door
- ⑥ Blind door
- ⑦ Jumper SRD-600
- ⑧ Vertical profile U12/U6
- ⑨ Cable channel U12
- ⑩ Shelf
- ⑪ Screw M6x16 DIN 912
- ⑫ Leg M10x30
- ⑬ Hex key 5 mm - 1 pcs

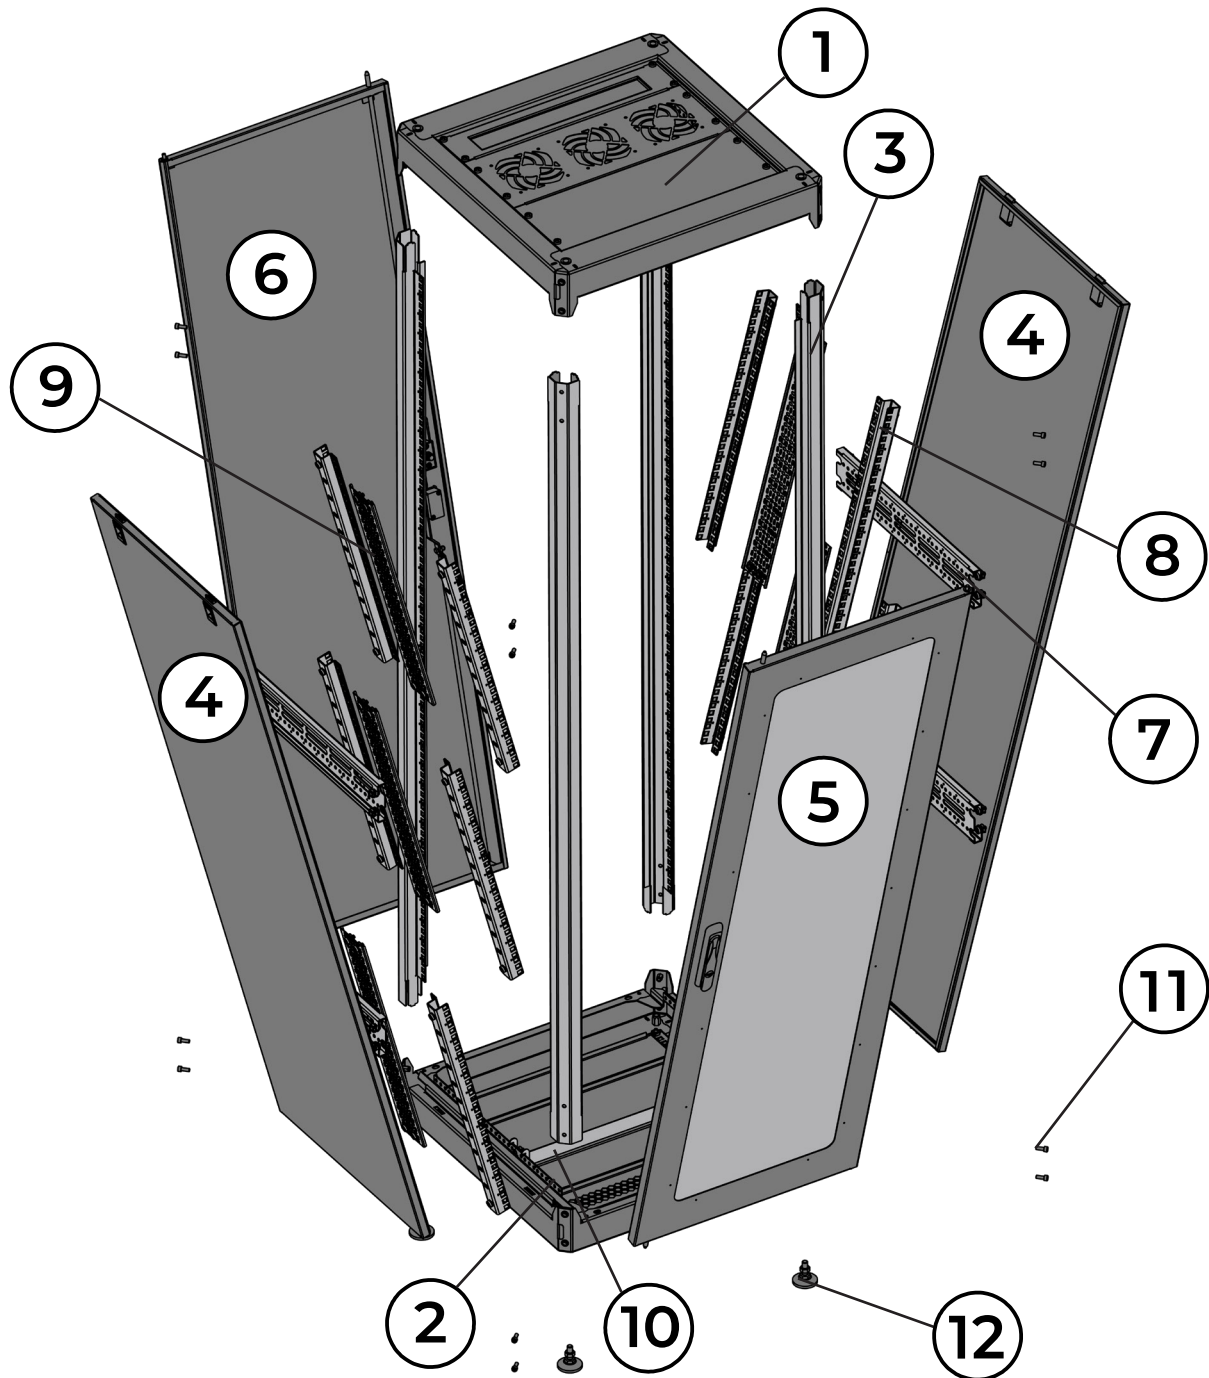


Assembly Guide

AV Rack SRD-600 series


Assembly Instructions:

1

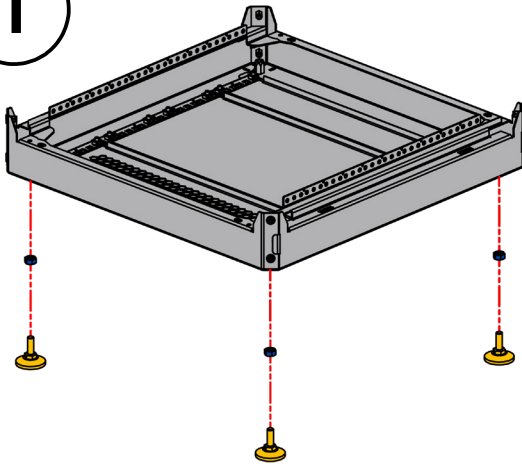


1. Start the assembly by installing legs (12) into bottom frame (2).

1.1

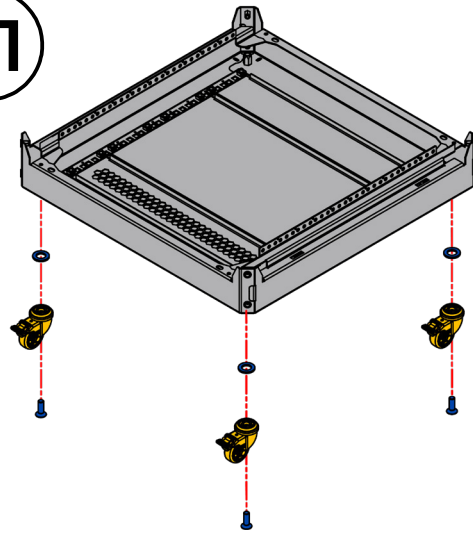


1.1. Optional!!! Install a Wheels Set 50 instead of legs.

2

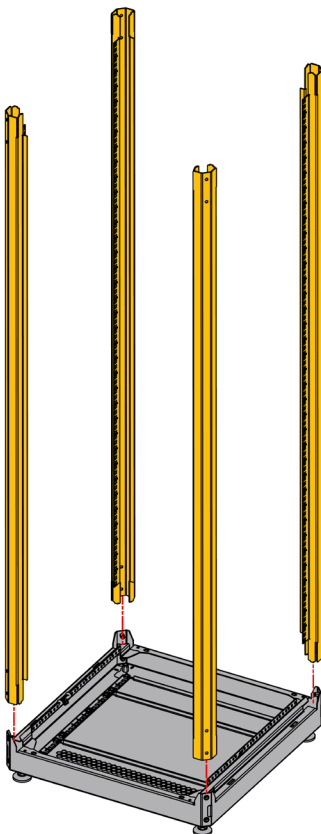

2. Install pillars (3) in the frame (2), without fixing them with screws.

3

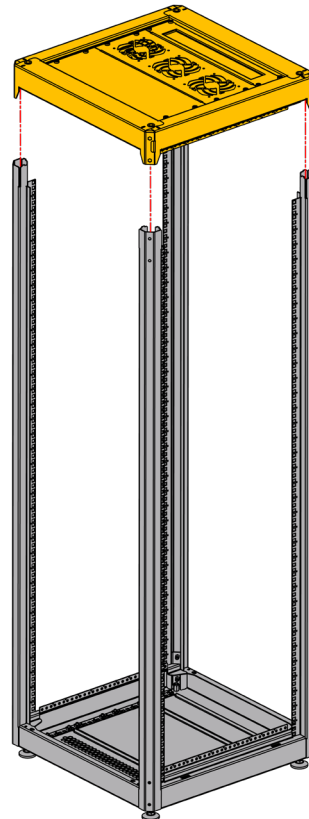


3. Install the top frame (1) onto pillars (3), without fixing them with screws.

Assembly Guide


AV Rack SRD-600 series

4

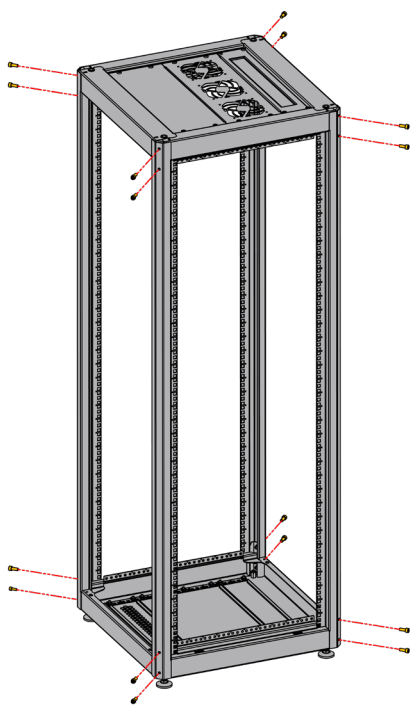


4. Tighten the screws (11) of all pillars (3).

5

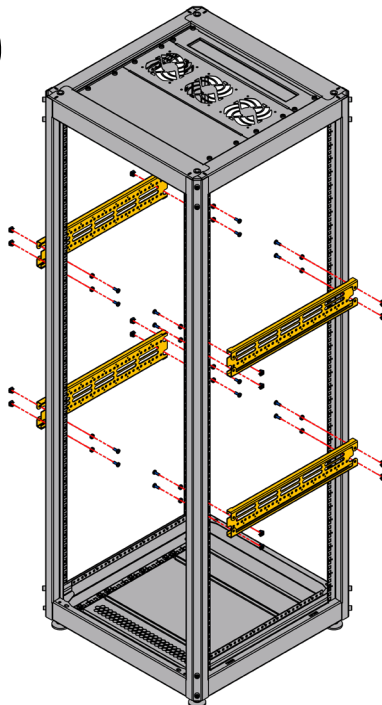


5. Install Jumpers (7) from the inside frames.

6

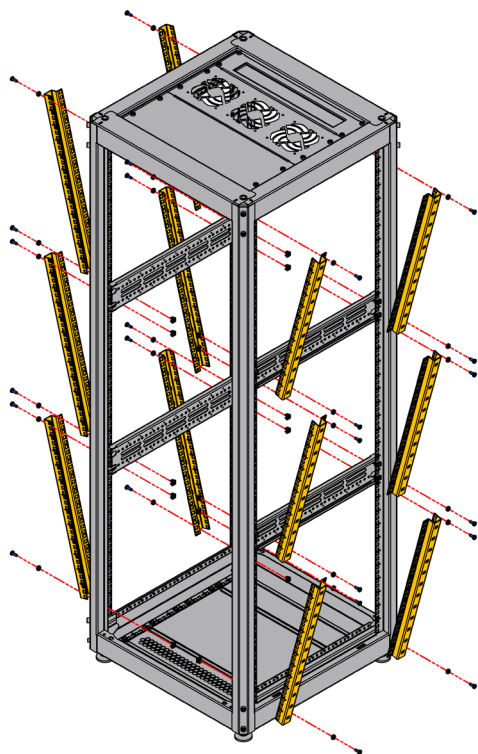

6. Install Vertical profiles (8) from the inside frames.




7

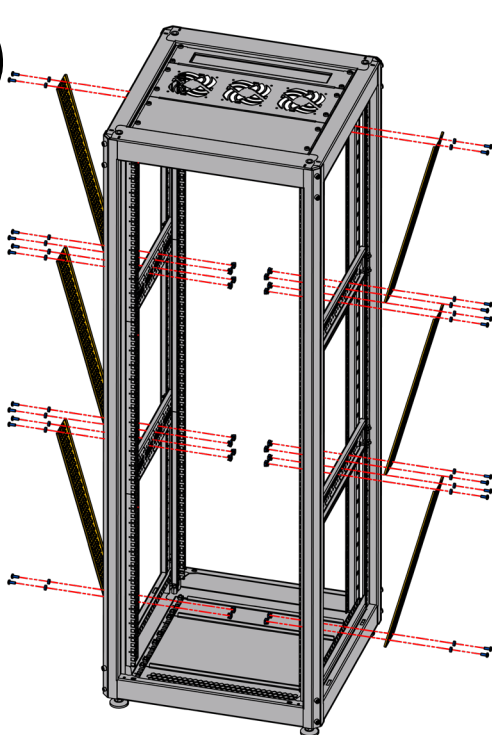

7. Install Cable channels (9) from the inside frames.

Assembly Guide

AV Rack SRD-600 series

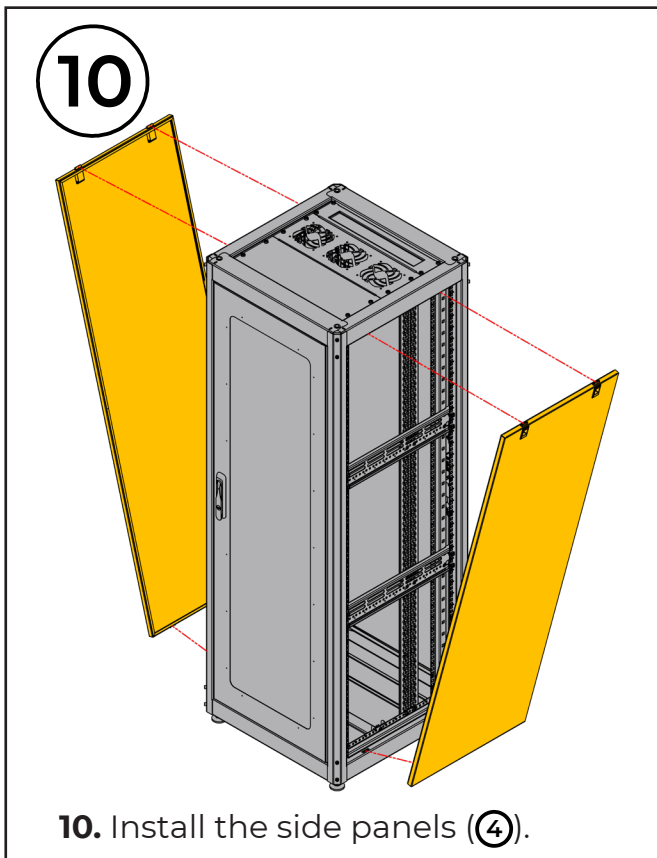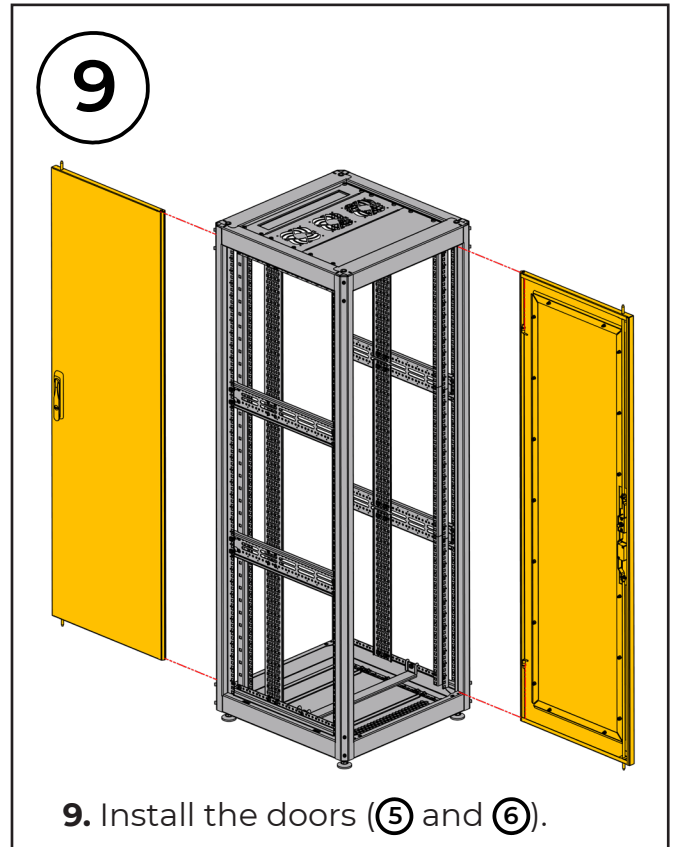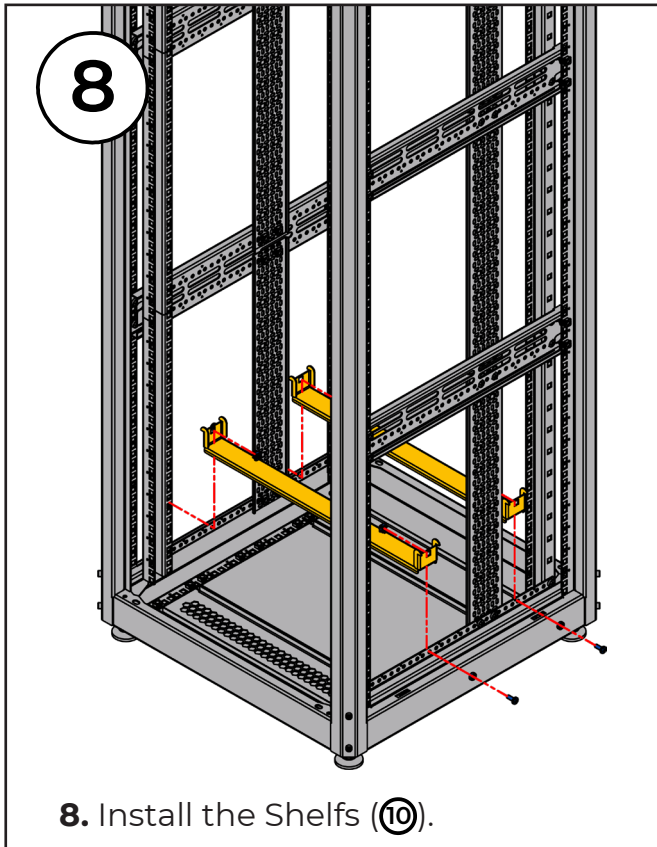

SAFETY INSTRUCTIONS

1. Entrust mounting equipment only to experienced professionals and strictly follow the provided safety instructions. Improperly installed equipment may result in property damage, personal injury and/or liability for the installing contractor.
2. Only use appropriate fastening hardware.
3. Always make sure to securely use and lock all mounting bolts. Loose bolts may become unscrewed over time due to vibration which will then create a safety hazard.