

# UBR-500


## U-Bracket

100 lbs (45 kg) max load

The UBR-500 is a universal U-Brackets, with adjustable width and depth. Accepts two M10 mounting bolts from the speaker.

This U-bracket supports loudspeakers weighing up to 45 kg (100 lbs.) and comes with a design factor of 7:1.

The UBR-500 has speaker width range 372 mm (14,65") - 532 mm (20,94"), and mounting depth 213 mm (8,39") - 363 mm (14,29").

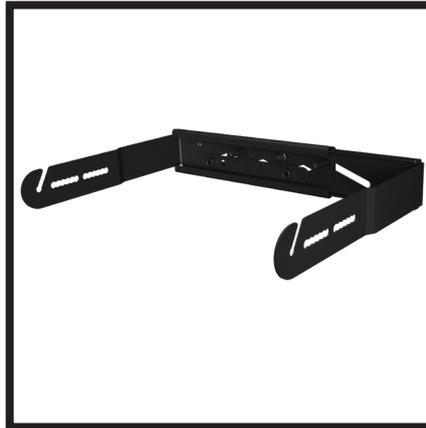

### SPECIFICATIONS:

Functions	U-bracket	
Speaker mounting holes	2 x M10	
Mounting holes	M10	
Speaker width range	372 - 532 mm	14,65" - 20,94"
Mounting depth	213 - 363 mm	8,39" - 14,29"
Pan angle	Depends on speaker geometry	
Load limit	45 kg	100 lbs
Design factor	7:1 ratio	
Dimensions	394 x 398 x 95 mm	15,51" x 15,67" x 3,72"
Shipping dimensions	455 x 435 x 110 mm	17,91" x 17,13" x 4,33"
Net weight	3,55 kg	7,83 lbs
Shipping weight (2 pcs per box)	7,4 kg	16,31 lbs

### OPTIONAL ACCESSORIES

1. WBM-1
2. CMT-HS

### SAFETY INSTRUCTIONS

1. Entrust mounting equipment only to experienced professionals and strictly follow the provided safety instructions. Improperly installed equipment may result in property damage, personal injury and/or liability for the installing contractor.
2. **Always use safety cables!** This will prevent equipment from falling during setup or while exploitation.
3. Always carefully check the mounting surface of the wall. Make sure the wall or ceiling structure allows to hold the weight of the speaker including its bracket.
4. Only use appropriate fastening hardware.
5. Always make sure to securely use and lock all mounting bolts. Loose bolts may become unscrewed over time due to vibration which will then create a safety hazard.

### PACKAGE CONTENTS




1. UBR-500 U-bracket - 2 pcs
2. Installation manual - 1 pcs
3. Wrench key 17 - 1 pcs
4. Wrench key 19 - 1 pcs

# UBR-500

U-Bracket

100 lbs (45 kg) max load

## Dimensions

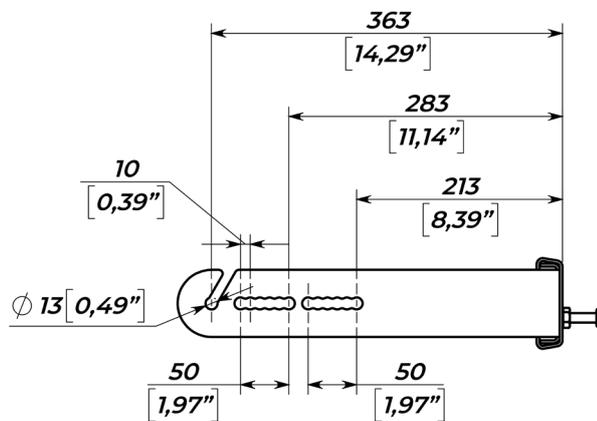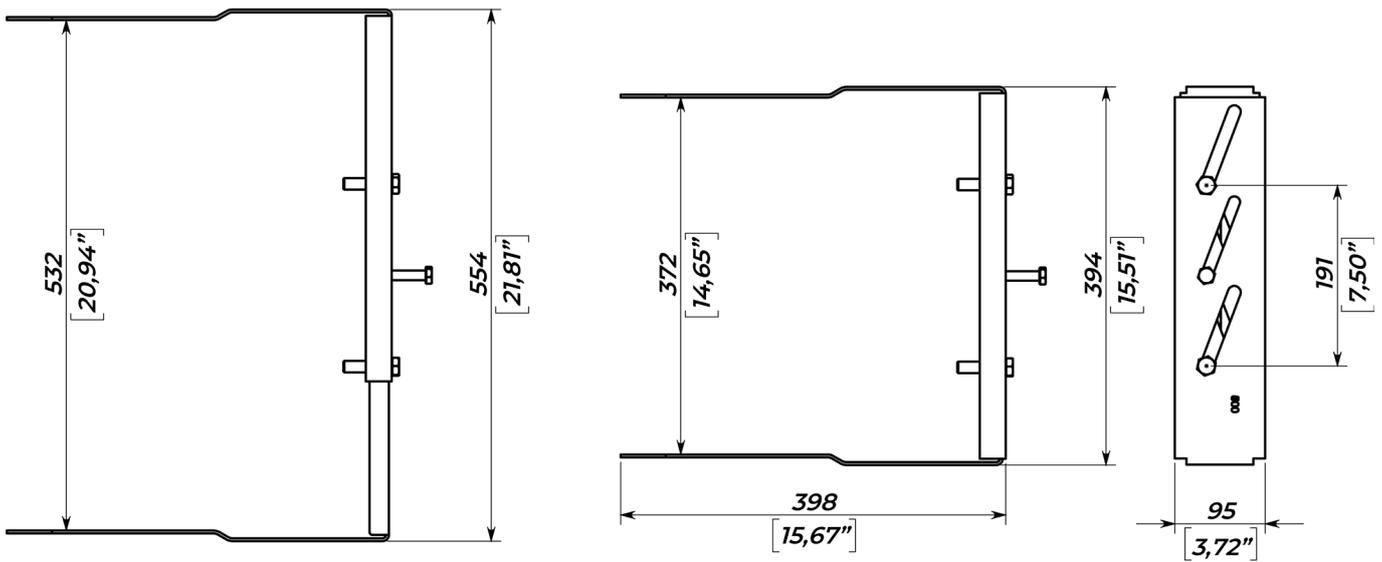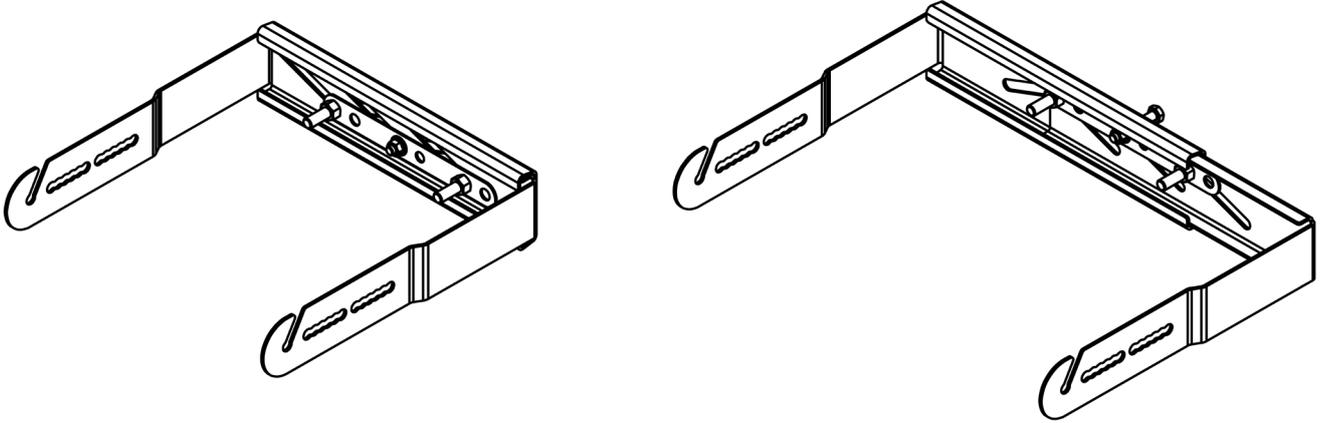

www.mnmounting.com  
info@mnmounting.com  
2 Merezhna str., Bila Tserkva,  
Kyiv region, 09100, Ukraine

EMEA & Asian region:  
+32 (0) 472 630212

USA, LATAM, Canada, Australia  
& New Zealand region:  
+1 (562) 607 7348

